

**25KG
PREMIXED PACK**

NB[®]
**TILE
ADHESIVE 113**

STRONG, TENACITY & SAVE COST





NB® Tile Adhesive 113


NB® Tile Adhesive 113 is a high performance, professional formula adhesive with high bond strength required for wall tiles and floor tiles installation. It is ready mixed to achieve better

quality, ensure a higher adhesiveness and stronger hold towards wall and floor surfaces for any ceramic tiles.

Besides acting as water retention agent for installation, it provides maximum resistance to intermittent water exposure, NB® Tile Adhesive 113 is suitable for both internal and external use. It is easy to construct and handle, convenient for construction progress. By using NB® Tile Adhesive 113, obstructions of fall off tiles will be resolve.

Comparison of Tensile Adhesion Strength on Floor Tiles

Result Shown After 30 Minutes While Remove From Floor Surface

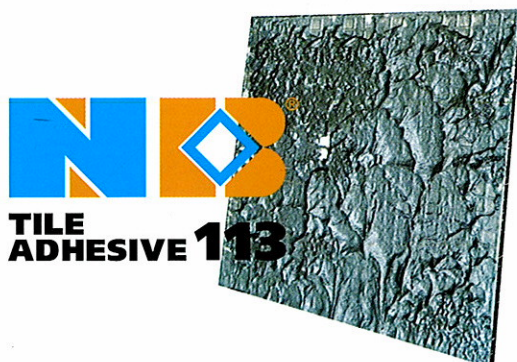

Product Facts & Properties

Application:

Installation to tiles is with reference to BS 5385: Code of practice for installation of internal and external, wall and floor ceramic tiles.

All expansion joints and movement joints must extend through adhesive bed and tiles

- For wall tiling, the maximum final adhesive bed thickness should be less than 3mm.
- For floor tiling, the maximum final adhesive bed thickness should be 3-6mm.
- Usually, notched trowelling and buttering method of application is used.



Mixing Ratio:

NB® Tile Adhesive 113 : 25KG
Water : 6.0 - 6.5L

Recommended Mixing Time:

Mixing NB® Tile Adhesive 113 with proper ratio of water and stir evenly.

Safety Precaution:

Wash with water if product has contact with eyes, and seek doctor's advise if symptoms persist.

Material:

Raw material from Germany.
Premix in Malaysia.

Data Sheet:

Appearance : Fine, Grey

Conjugates : Ordinary Portland Cement & Zone 2 sand

Components : Tricalcium Silicate & Dicalcium Silicate

Water Ratio : 0.25L/kg

Wet Density : 1400 - 1500 kg/m³

Dry Density : 1300 - 1400 kg/m³


Pot Life : within 2 hours

Coverage : 20 Sqft

Recommended Thickness : 3 - 6mm

Adhesion According to MS ISO 13007-1 & 2: 2005 : > 0.5N/mm²

Open Time According to MS ISO 13007-1 & 2: 2005 : > 0.5 /mm² after not less than 20 minutes

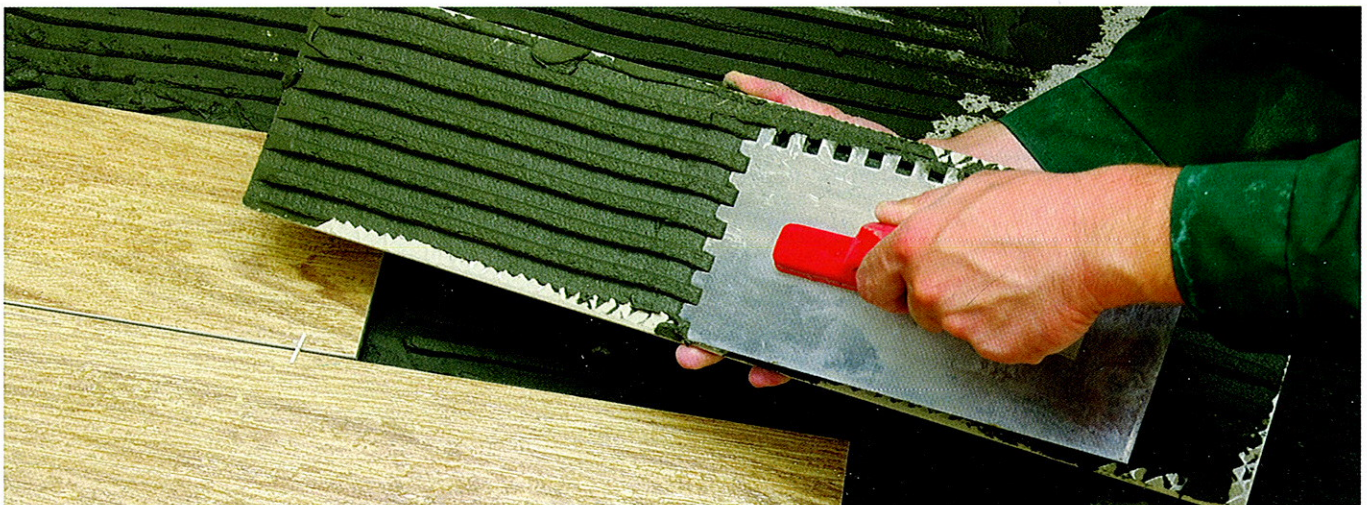

Recommended Products:



MH Mix



NB® Adhesive Powder Mix




KB® TILE GLUE



MH COAT - Base Coat 309



MH COAT - Finish Coat 339

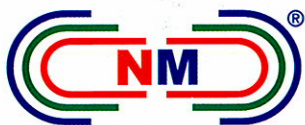

Quality Building Solutions Partner

www.nilaimayang.com